


Description of the SANI-BOOST 50 (30 m throw)

Pos.	Code	Description
1	Trailer	Universal off road trailer with 2 off-road wheels, zinc coated, levelling jack, forklift movable.
2	50.10.000	Blower SANI-BOOST 50 complete with electric motor-vent, with high efficiency vent and air flow straightens, electric protection IP55, max. power 5,5kw, n. 1 stainless steel crown with 33 ejectors and ejector support in stainless steel
3	50.14.015	Mechanic system for manual rotation (0°-340°) and manual raising (-20°/+45°)
4	50.14.050	Electric control, with on/off command of the blower, and water pump, electric protection IP55
5	50.14.080	Water filter with cartridge extractable and washable.
6	50.14.085	Manual valve in input
7	Mxsv 2,2	Electric water pump, power 2,2 kW, electric cables, PG, supports.
8		Factory testing for each unit supplied
9		Warranty 24 months



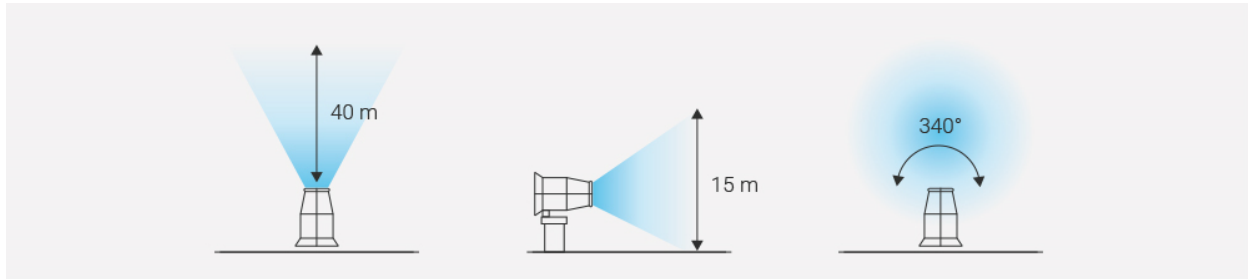

Necessary conditions for the installation of the SANI-BOOST 50 (at customers charge)

- Electric power 7,7kW/400 Volt 50 Hz, cable to the control board of the machine, 3P+N+G 400Volt AC 50 Hz 32A;
- Water supply line, minimum pressure 0,5 bar.
- Lifting equipment on job site for men and machine;
- Terrain preparation for the mounting of the machine.

Optional Accessories for SANI-BOOST 50 available on request

1	50.14.100	Ergonomic radio command, with on/off commands for the blower, and water pump, complete with battery charger and all electronics to be installed in the main control panel	
2	50.14.010	Electro-mechanic system for rotation (0° - 270°) with steps of 30 degrees settable with manual limit switches	
3	50.14.090	Main electrovalve in input to water filter	

